Sample Street Tree Plan

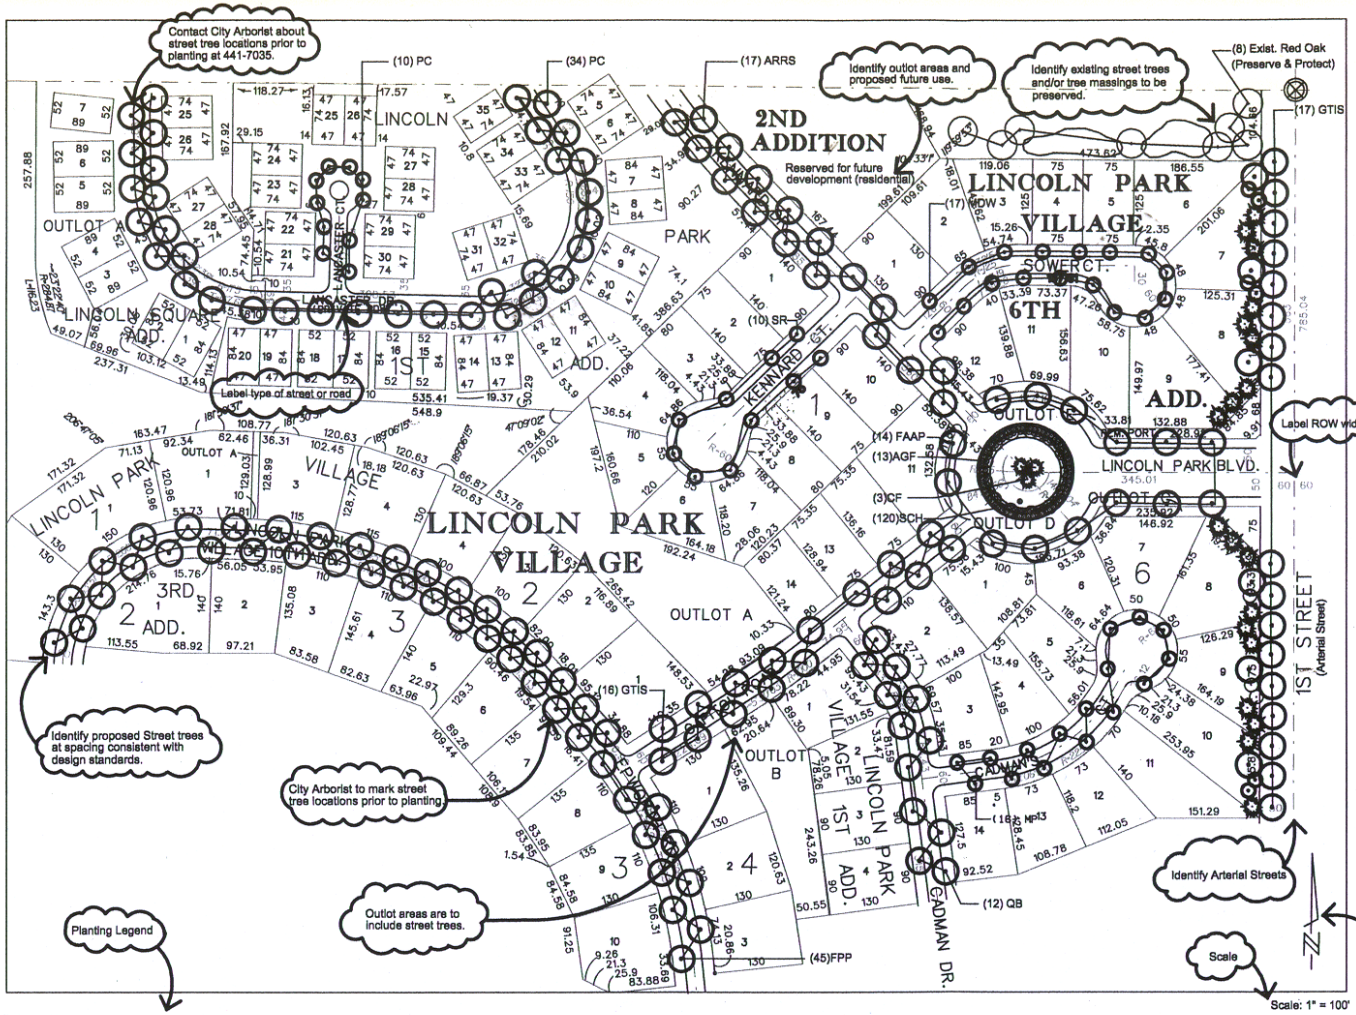

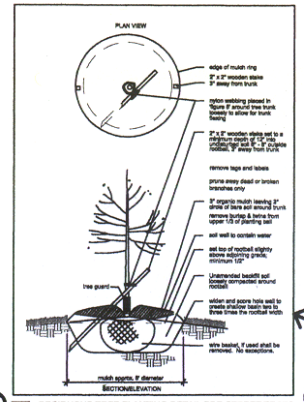

1 DECIDUOUS TREE PLANTING DETAIL FOR STREET TREES
Not to scale

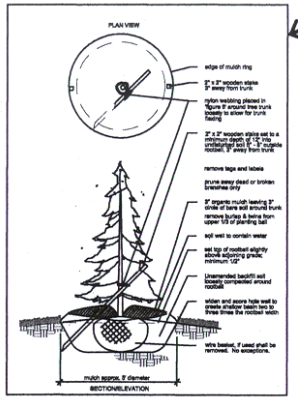

2 EVERGREEN TREE PLANTING DETAIL
Not to scale

Current Tree Planting Details

LPR design group
2740 "A" Street
Lincoln, NE 68502

Design Firm Name & Address

LINCOLN PARK VILLAGE

Project Title

PROJECT TITLE

Proposed Landscape Schedule

LOCATION	COMMON NAME	BOTANICAL NAME	SYMBOL	SIZE AT PLANTING	PLANTING METHOD	DESIGN W.	DESIGN HT.	QUANTITY SCREEN	QUANTITY STREET
1ST STREET	Shademaster Locust	Gleditsia triacanthos inermis 'Shademaster'	GTIS	1 1/2" CAL.	B&B	35'	45'		17
LINCOLN PARK BLVD.	Autumn Purple Ash	Fraxinus americana ' Autumn Purple'	FAAP	1 1/2" CAL.	B&B	40'	45'		14
CAPITOL ROAD	Shademaster Locust	Gleditsia triacanthos inermis 'Shademaster'	GTIS	1 1/2" CAL.	B&B	35'	45'		16
CADMAN COURT	Prairiefire Crabapple	Malus 'Prairiefire'	MP	1 1/2" CAL.	B&B	18'	20'		16
CADMAN DRIVE	Swamp White Oak	Quercus bicolor	QB	1 1/2" CAL.	B&B	45'	45'		12
SOWER COURT	Donald Wyman Crabapple	Malus 'Donald Wyman'	MDW	1 1/2" CAL.	B&B	24'	20'		17
KENNARD DRIVE	Red Sunset Maple	Acer rubrum 'Red Sunset'	ARRS	1 1/2" CAL.	B&B	35'	45'		17
KENNARD COURT	Japanese Tree Lilac	Syringa reticulata	SR	1 1/2" CAL.	B&B	15'	15'		10
EPWORTH ROAD	Patmore Ash	Fraxinus pennsylvanica 'Patmore'	FPP	1 1/2" CAL.	B&B	35'	45'		45
LANCASTER DRIVE	Autumn Blaze Maple	Acer x rubrum 'Autumn Blaze'	ARAB	1 1/2" CAL.	B&B	40'	50'		34
LANCASTER COURT	Chanticleer Pear	Pyrus 'Chanticleer'	PC	1 1/2" CAL.	B&B	15'	40'		10
LINCOLN PARK BLVD.	Flame Amur Maple (Single Stem)	Acer ginnala 'Flame'	AGF	1 1/2" CAL.	B&B	20'	20'		13
LINCOLN PARK BLVD.	White Fir	Concolor fir	CF	5' HT.	B&B	40'	20'		9
LINCOLN PARK BLVD.	Hancock Coralberry	Symphoricarpos x chenaultii 'Hancock'	SCH	NO. 3 CONT.		2 1/2	5'		120
1ST STREET	Autumn Purple Ash	Fraxinus americana ' Autumn Purple'	FAAP	1 1/2" CAL.	B&B	40'	45'	6	
1ST STREET	Colorado Green Spruce	Picea pungens	PP	1 1/2" CAL.	B&B	20'	40'	13	
1ST STREET	Autumn Brilliance Serviceberry	Amelanchier 'Autumn Brilliance'	AAB	1 1/2" CAL.	B&B	15'	20'	10	

General Notes:

1. Pursuant to Chapter 2.35, Design Standards for Street Trees, and Section 12.20 of the Lincoln Muncipal Code, street tree locations shall be marked by the City Arborist, or designee prior to planting.
2. Utility locations shownare approximate. Contractor shall verify locations and depths to all utilities which exist on or near the project site. Prior to planting, the contractor shall contact Diggers Hotline at 1-800-331-5666 to have utilities marked.
3. City ordinance requires that planted trees have a minimum trunk diameter of 1".
4. Landscaping shall be installed per Chapter 31 of City of Lincoln Standard Specifications for Municipal Construction.

Location Map:



Names, Dates, Revision No., etc.

Landscape Plan

REVISIONS	01/12/04
DATE	01/12/04
DRAWN BY	MEC
CHECKED BY	LJ/SS
PROJECT NO.	LPV Landscape 011204
SHEET NO.	1/1